



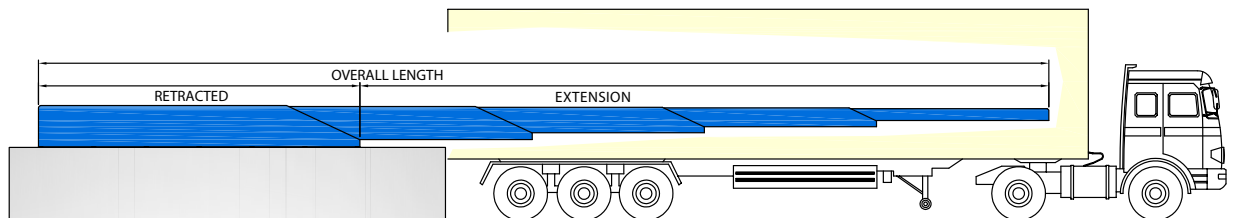

SOLUTIONS AND EQUIPMENT FOR LOOSE LOADING AND UNLOADING

BESTREACH MAXXREACH TELESCOPIC BELTCONVEYORS

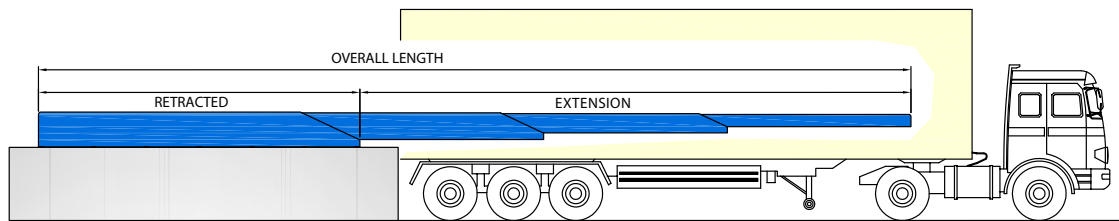

CONVEYORS with	BESTREACH				MAXXREACH					
	3 sections		4 sections		3 sections				4 sections	
	BR3135	BR3150	BR4150	BR4170	MR3150	MR3170	MR3185	MR3198	MR4150	MR4170
Retracted	6.5m	8m	6.5m	7.5m	7.3m	8.0m	8.8m	9.2m	6.5m	7.5m
Extension (Reach)	13.5m	15m	15m	17m	15m	17m	18.5m	19.8m	15m	17m
Overall Length	20m	23m	21.5m	24.5m	22.3m	25.0m	27.3m	29m	21.5m	24.5m

STANDARD EQUIPMENT

- Heavy Duty Construction, section thickness main case 10mm
- Standard equipment : Siemens STEP 7 PLC and LED headlight in front
- Loading capacity : 50 kg/metre, according to application
- Standard belt widths : 600 or 800mm (others on request)
- Height top of belt according to application



PERFORMANCE & ERGONOMICS

Man-Rider 650 x 1800mm


Hydraulic Tilt from -1 to $+3^{\circ}$









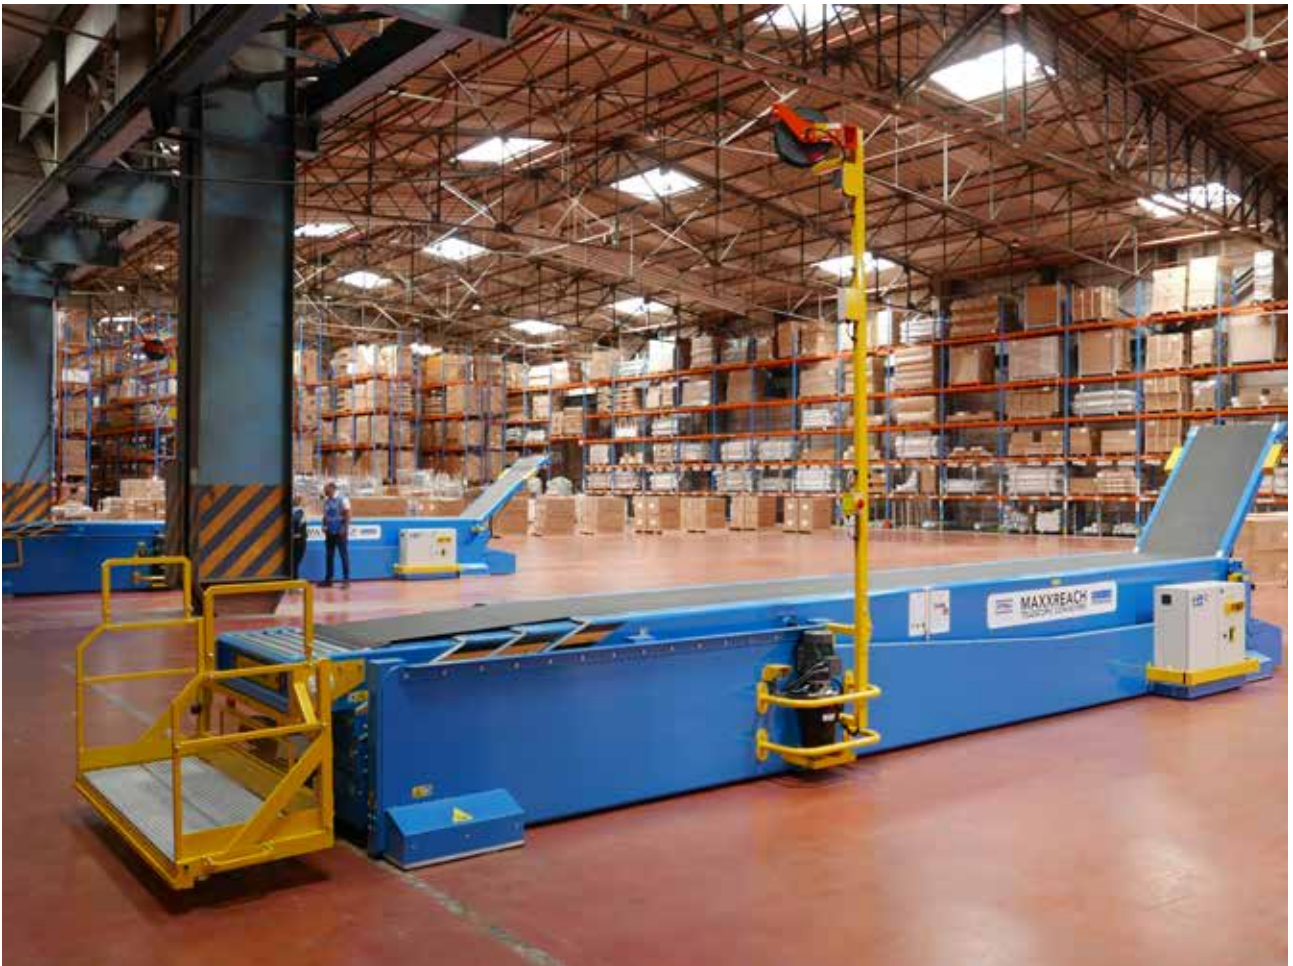







POWERFLEX

MOTORIZED FLEXIBLE CONVEYORS



Type PF15

POWERFLEX

Rollers Ø 40mm

- Very robust Construction
- Drive capacity : 150 kg/metre
- Castors Ø 150x50 mm
- Standard roller pitch 127mm
Available options : pitch 76 and 102mm
- Bright zinc plated rollers Ø 40mm
- Adjustable height : 800 to 1100 mm
- Available in any length
- Speed regulation : from 5 to 60 cm/sec
- Electrical connection : single phase 220V

Type PF19

POWERFLEX

Rollers Ø 50mm

- Very robust Construction
- Drive capacity : 150 kg/metre
- Castors Ø 200x50 mm
- Standard roller pitch 127mm
Available options : pitch 76 and 102mm
- Bright zinc plated rollers Ø 50mm
- Adjustable height : 725 to 950 mm
- Available in any length
- Speed regulation : from 5 to 60 cm/sec
- Electrical connection : single phase 220V

Type PF15 POWERFLEX Rollers Ø 40mm

EXAMPLE	Lengths Expanded & Closed
Width 600 mm	14.6 m - 4.9 m 18.3 m - 6.1 m 19.6 m - 6.6 m 30.5 m - 10.2 m Any length available
Width 750 mm	14.6 m - 4.9 m 18.3 m - 6.1 m 19.6 m - 6.6 m 30.5 m - 10.2 m Any length available
Width 900 mm	14.6 m - 4.9 m 18.3 m - 6.1 m 19.6 m - 6.6 m 30.5 m - 10.2 m Any length available

Type PF19 POWERFLEX Rollers Ø 50mm

EXAMPLE	Lengths Expanded & Closed
Width 600 mm	14.6 m - 6.2 m 18.3 m - 7.8 m 19.6 m - 8.3 m 30.5 m - 13 m Any length available
Width 750 mm	14.6 m - 6.2 m 18.3 m - 7.8 m 19.6 m - 8.3 m 30.5 m - 13 m Any length available
Width 900 mm	14.6 m - 6.2 m 18.3 m - 7.8 m 19.6 m - 8.3 m 30.5 m - 13 m Any length available









BESTFLEX

GRAVITY FLEXIBLE CONVEYORS



Type BFR BESTFLEX with Rollers

- Very robust Construction
- Load capacity : 220 kg/metre
- Castors Ø 127x38 mm
- Standard roller pitch 127mm
Available options : pitch 76 and 102mm
- Bright zinc plated rollers Ø 35mm
- Adjustable height : 720 to 1000 mm

EXAMPLE	Lengths Expanded & Closed
Width 600 mm	4.9 m - 1.7 m 6.1 m - 2.1 m 7.4 m - 2.6 m 9.8 m - 3.4 m Any length available
Width 750 mm	4.9 m - 1.7 m 6.1 m - 2.1 m 7.4 m - 2.6 m 9.8 m - 3.4 m Any length available
Width 900 mm	4.9 m - 1.7 m 6.1 m - 2.1 m 7.4 m - 2.6 m 9.8 m - 3.4 m Any length available



Type BF/200 BESTFLEX with Skatewheels

- Very robust Construction
- Load capacity : 300 kg/metre
- Castors Ø 127x38 mm
- Standard roller pitch 127mm
Available options : pitch 76 and 102mm
- Zinc plated or plastic skatewheels Ø 48mm
- Adjustable height : 720 to 1000 mm

EXAMPLE	Lengths Expanded & Closed
Width 600 mm	4.9 m - 1.3 m 6.1 m - 1.6 m 7.4 m - 2 m 9.8 m - 2.6 m Any length available
Width 750 mm	4.9 m - 1.3 m 6.1 m - 1.6 m 7.4 m - 2 m 9.8 m - 2.6 m Any length available
Width 900 mm	4.9 m - 1.3 m 6.1 m - 1.6 m 7.4 m - 2 m 9.8 m - 2.6 m Any length available

BESTCONNECT MOBILE MOTORIZED CONVEYORS



STANDARD EQUIPMENT


- Mobile modular conveyors
- Electrical connection : single phase 220V
- Speed regulation : from 5 to 60 cm/sec
- Standard widths : 600, 750 & 900mm
- Bright zinc plated rollers Ø 50mm
- Standard rollerpitch : 75 & 100mm
- Standard bidirectional drive
- Reconfigurable layout






BESTREACH MVL MOBILE VEHICLE LOADER

- Contact us for more information

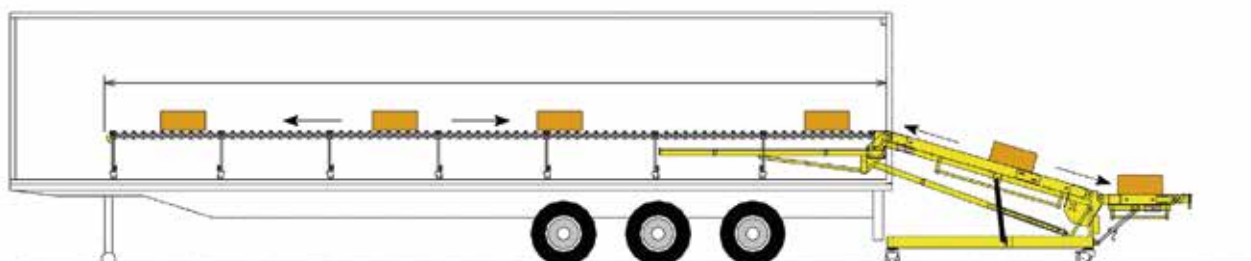

BESTREACH SVL SMALL VEHICLE LOADER

- Contact us for more information

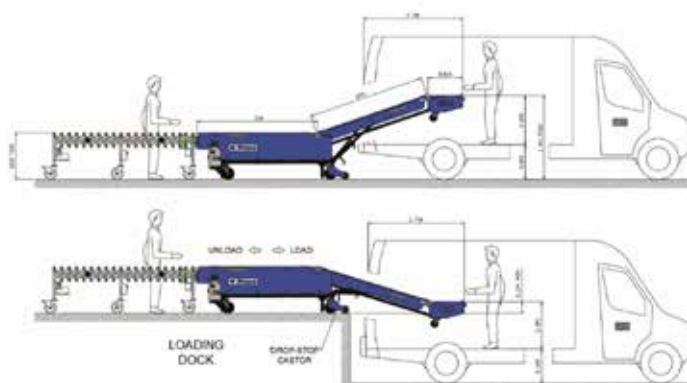



C O N V E Y O R S

A DURAVANT COMPANY



Exclusive distributor
for the Benelux & France

UVOTec BV

FMH CONVEYORS Benelux & France

Tel : +32.3.455.43.22

Email : info@uvotec.eu www.uvotec.eu

WE HAVE SPECIFIC SOLUTIONS FOR YOUR APPLICATION